

Getac

Rugged Mobile Computing Solutions

T800

Fully Rugged Tablet




- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring Smart card and contactless RFID reader Combo or 2nd expanded battery
- Choice of 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet
- LifeSupport™ battery swappable technology for uninterrupted battery life
- MIL-STD-810G and IP65 certified



Office Dock



SnapBack Add-on

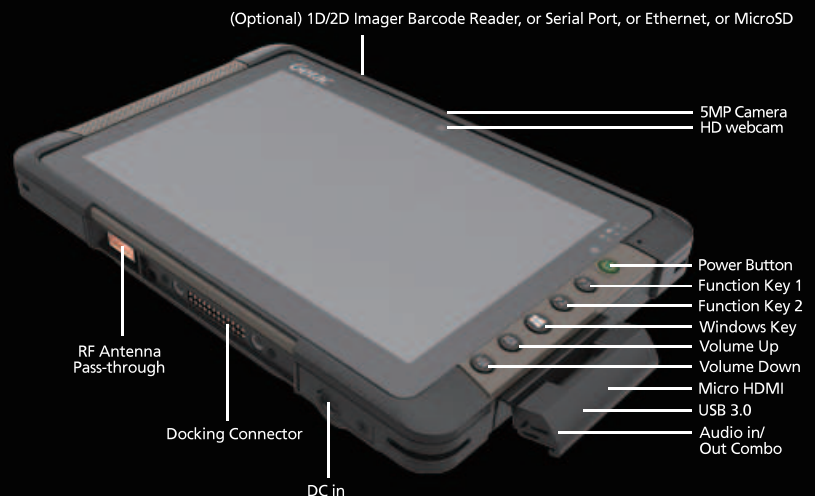



Specification

Operating System	Windows® 8 Professional Windows® 7 Professional
Mobile Computing Platform	Intel® Pentium® Processor N3530 2.16 GHz, burst up to 2.58 GHz - 2M Cache
VGA Controller	Intel® HD Graphics
Display	8.1" TFT LCD HD (1280 x 800) 600 nits LumiBond® display with Getac sunlight readable technology
Storage & Memory	4GB DDR3L SSD 64GB / 128GB
Keyboard	6 tablet buttons (Windows, Power, Function Key, Camera Capture/Barcode Reader Trigger, Volume Up, Volume Down)
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)
Expansion Slots	Choice of 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet ⁱ Optional SnapBack add-on: Smart card and contactless RFID reader combo ⁱⁱ Optional SnapBack add-on: 2nd expanded battery ⁱⁱ
I/O Interface	HD webcam x 1 5M pixels auto focus rear camera x 1 USB 3.0 (9-pin) x 1 Headphone out/Mic-in Combo x 1 DC in Jack x 1 Micro HDMI x 1 Docking connector (24-pin) x 1 Optional RF antenna pass-through for GPS, WWAN and WLAN Optional - 1D/2D imager barcode reader ⁱ x 1 (occupies expansion slot) - Serial port (9-pin; D-sub) ^j x 1 (occupies expansion slot) - LAN (RJ45) ^k x 1 (occupies expansion slot) - MicroSD card reader ^l x 1 (occupies expansion slot)

Communication Interface	Optional 10/100/1000 base-T Ethernet (occupies expansion slot) Intel® Dual Band Wireless-AC 7260, 802.11ac Bluetooth (v4.0 class 1) Optional SiRFstarIV™ GPS Optional Gobi™ mobile broadband
Software	Getac Utility Getac Camera Getac V-GPS Adobe® Reader®
Security Features	Optional SnapBack add-on: Smart card and contactless RFID reader combo ⁱⁱⁱ
Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (7.4V, 4200mAh) (up to 8 hours of battery life) ^{iv} LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)
Dimension (W x D x H) & Weight	227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.88kg (1.94 lbs) ^v
Rugged Features	MIL-STD-810G certified and IP65 certified 6 feet drop resistant Optional ANSI/ISA 12.12.01 Vibration & drop resistant e Mark certified for vehicle usage
Environmental Specifications	Temperature ^{vi} : - Operating: -21°C to 50°C / -5.8°F to 122°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing
Accessories	Carry bag Battery charger Main battery (7.4V, 4200mAh) 2nd expanded battery (14.4V, 2100 mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus & tether Digitizer pen Shoulder strap (2-point) Hand strap Wrist strap Protection film Vehicle dock Office dock

Docking solution

	External VGA	Microphone	Audio Output	DC in Jack	USB	LAN	HDMI	RF antenna connector (WWAN, WLAN, GPS)
Vehicle Dock	--	--	--	1	2	1	--	3
Office Dock	1	1	1	1	4	1	1	--

ⁱ Barcode reader, Serial, Ethernet, and MicroSD port are mutually exclusive options.

ⁱⁱ All SnapBack add-ons are mutually exclusive options.

ⁱⁱⁱ 13.56MHz Contactless RFID and Smart Card reader (ISO 15693 and 14443 A/B compliant).

^{iv} Battery life testing conducted under MobileMark 2007. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

^v Weight varies from configurations and optional accessories.

^{vi} Tested by a national independent third party test lab following MIL-STD-810G.



Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist.,
Taipei City, 11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888
globalmarketing@getac.com
www.getac.com



Getac

Rugged Mobile Computing Solutions

T800 Android Fully Rugged Tablet




- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring Smart card and contactless RFID reader Combo or 2nd expanded battery
- Optional 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet
- LifeSupport™ battery swappable technology for uninterrupted battery life
- MIL-STD-810G and IP65 certified



Office Dock



SnapBack Add-on

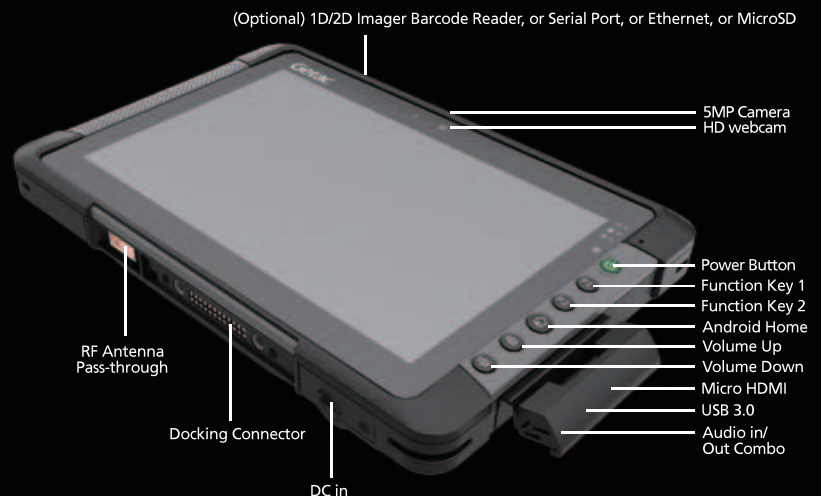

T800 Android Fully Rugged Tablet



Specification

Operating System	Android 4.4	Communication Interface	Optional 10/100/1000 base-T Ethernet (occupies expansion slot) Intel® Dual Band Wireless-AC 7260, 802.11ac Bluetooth (v4.0 class 1) Optional dedicated GPS Optional Gobi™ mobile broadband
Mobile Computing Platform	Intel® Celeron® N2930 1.83 GHz, burst up to 2.16 GHz - 2MB cache	Software	Getac File Manager GPS-Ecompass Barcode Reader Utility ⁱⁱⁱ
VGA Controller	Intel® HD Graphics	Security Features	Optional SnapBack add-on: Smart card and contactless RFID reader combo ^{iv}
Display	8.1" TFT LCD HD (1280 x 800) 600 nits LumiBond® display with Getac sunlight readable technology	Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (7.4V, 4200mAh) (up to 8 hours of battery life) ^v LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)
Storage & Memory	2GB DDR3L SSD 32GB / 64GB	Dimension (W x D x H) & Weight	227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.88kg (1.94 lbs) ^{vi}
Keyboard	6 tablet buttons (Power, Camera Capture, Recent APPs/Barcode Reader Trigger, Android Home, Volume Up, Volume Down)	Rugged Features	MIL-STD-810G certified and IP65 certified 6 feet drop resistant Optional ANSI/ISA 12.12.01 Vibration & drop resistant e-Mark certified for vehicle usage
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)	Environmental Specifications	Temperature ^{vii} : - Operating: -21°C to 50°C / -5.8°F to 122°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing
Expansion Slots	Optional 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet ⁱ Optional SnapBack add-on: Smart card and contactless RFID reader combo ⁱⁱ Optional SnapBack add-on: 2nd expanded battery ⁱⁱ	Accessories	Carry bag Battery charger Main battery (7.4V, 4200mAh) 2nd expanded battery (14.4V, 2100 mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus & tether Digitizer pen Shoulder strap (2-point) Hand strap Wrist strap Protection film Vehicle cradle Vehicle dock Office dock
I/O Interface	HD webcam x 1 5M pixels auto focus rear camera x 1 USB 3.0 (9-pin) x 1 Headphone out/Mic-in Combo x 1 DC in Jack x 1 Micro HDMI x 1 Docking connector (24-pin) x 1 Optional RF antenna pass-through for GPS, WWAN and WLAN		

Docking solution

	Microphone	Audio Output	DC in Jack	USB	LAN	RF antennae connector (WWAN, WLAN, GPS)
Vehicle Dock	--	--	1	2	1	3
Office Dock	1	1	1	4	1	--

ⁱ Barcode reader, Serial, Ethernet, and MicroSD port are mutually exclusive options.

ⁱⁱ All SnapBack add-ons are mutually exclusive options.

ⁱⁱⁱ Available for barcode reader option.

^{iv} 13.56MHz Contactless RFID and Smart Card reader (ISO 15693 and 14443 A/B compliant).

^v Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions.

The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

^{vi} Weight varies from configurations and optional accessories.

^{vii} Tested by a national independent third party test lab following MIL-STD-810G.

Getac



Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist.,
Taipei City, 11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888
globalmarketing@getac.com
www.getac.com

Getac

Rugged Mobile Computing Solutions

T800-Ex

Fully Rugged Tablet



- EU Explosive Atmosphere ATEX Certified
- 8.1" HD LumiBond® display for better viewing experience
- 1D/2D imager barcoder reader
- LifeSupport™ battery swappable technology for uninterrupted battery life
- MIL-STD-810G and IP65 certified



SnapBack Add-on



Rugged Mobile Computing Solutions



Specification

Operating System	Windows 8 Professional Windows 7 Professional
Mobile Computing Platform	Intel® Pentium® Processor N3530 2.16 GHz, burst up to 2.58 GHz - 2MB Cache
VGA Controller	Intel® HD Graphics
Display	8.1" TFT LCD HD (1280 x 800) 600 nits LumiBond® display with Getac sunlight readable technology
Storage & Memory	4GB DDR3L SSD 64GB / 128GB / 256GB
Keyboard	6 tablet buttons (Windows, Power, Function Key, Camera Capture/ Barcode Reader Trigger, Volume Up, Volume Down)
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)
Expansion Slots	1D/2D imager barcoder reader Optional SnapBack add-on: 2nd expanded battery
I/O Interface	HD webcam x1 8M pixels auto focus rear camera x1 USB 3.0 (9-pin) x1 Headphone out/ Mic-in Combo x1 DC in Jack x1 Micro HDMI x1
Communication Interface	Intel® Dual Band Wireless-AC 7260, 802.11ac Bluetooth (v4.0 class 1) Optional dedicated GPS Optional Gobi™ mobile broadband

Software	Getac Utility Getac Camera Getac V-GPS Adobe® Reader®
Security Features	Optional TPM 1.2
Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (7.4V, 4200mAh) (up to 8 hours of battery life) ⁱ LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)
Dimension (W x D x H) & Weight	2227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.915kg (2.017 lbs) ⁱⁱ
Rugged Features	MIL-STD-810G certified and IP65 certified 6 feet drop resistant Vibration & drop resistant
Environmental Specifications	Temperature ⁱⁱⁱ : - Operating: -21°C to 50°C / -5.8°F to 122°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH , non-condensing
ATEX Certification	ATEX zone 2/22 II 3G Ex ic IIC T4 Gc II 3D Ex ic IIIB T130°C Dc
Accessories	Carry bag Battery charger Main battery (7.4V, 4200mAh) 2nd expanded battery (14.4V, 2100 mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus & tether Digitizer pen Shoulder strap (2-point) Hand-strap Wrist-strap Protection film Multi-Bay Charger (Eight Bay)

ⁱ Battery life testing conducted under MobileMark 2007. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions.

The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

ⁱⁱ Weight varies from configurations and optional accessories.

ⁱⁱⁱ Tested by a national independent third party test lab following MIL-STD-810G.

Getac



Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist.,
Taipei City, 11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888
globalmarketing@getac.com
www.getac.com

